


Tradical® Finilys

Super-thin aerial lime render for interior finishes
80 colours

Characteristics of Tradical® Finilys powder	
Density	< 0.68 +/- 0.05 kg/dm ³
Particle size distribution	0 to 0.7 mm

Characteristics of Tradical® Finilys hardened render	
Air quality	A+
Certification	Eurofins no. G15613A

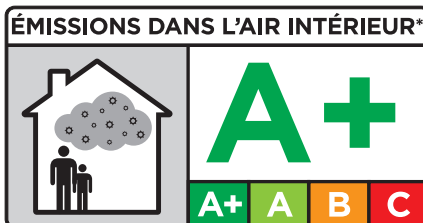

*Data on volatile substances present in the indoor air with a risk of toxicity by inhalation rated on a scale from A+ (very low emissions) to C (high emissions).

Definition

Super-thin render suitable for decorative interior finishes with a very fine texture, applied in 1 or 2 coats.
Benefits from the Tradical® Premium colouring system.

Identification

Tradical® Finilys is a super-thin, ready-to-mix aerial lime render, for manual application.

Areas of use

Tradical® Finilys is suitable for interior applications.

→ ADMISSIBLE SUBSTRATES

Tradical® Décor only.

→ PREPARATION

Preparing the substrates

Tradical® Finilys is applied **wet-on-wet** on Tradical® Décor, which must be smooth, surfaced, and free of debris.

Preparing the product

- Break up the dry powder (roll the bucket before opening)
- Slowly mix the dry powder for 1 to 2 minutes
- Pour 6 to 6.5 litres of clean water into the bucket of Tradical® Finilys
- Slowly mix to achieve a firm mixture
- Leave to stand for 10 to 15 minutes
- Add 1/4 to 1/2 litre of water according to the desired workability
- Slowly mix again to achieve a uniform mixture
- Do not add anything else

Tools

Mixer, measurer, stainless steel finishing trowel, as well as plastering and inside & outside corner trowels.

→ APPLICATION

- Manual application
- Tradical® Finilys is applied **wet-on-wet** between 8 and 48 hours after the coat of Tradical® Décor has hardened
- Wet the Tradical® Décor substrate if required and leave to dry before applying Tradical® Finilys, according to the RENDER FINISH or REINFORCED RENDER FINISH procedure:

RENDER FINISH

1 coat.

Apply and work the Tradical® Finilys to obtain the desired appearance.

Examples of aspects:

- "Rough cast" as the work progresses
- "Smooth floated surface" achieved by gentle smoothing

Tradical® Finilys includes:

Tradical® Interior Lime Render:

- Tradical® Décor
- Tradical® Finilys
- Tradical® Lait de Chaux
- Tradical® Premium
- Tradical® Pont d'Adhérence
- Tradical® Régulateur de Porosité



Lhoist Southern Europe
BCB

Adresse: ZAC de Valentin
rue du Choumois - BP 3011
25045 BESANÇON cedex
Tel. + 33 (0)3 81 47 40 10
Fax + 33 (0)3 81 47 40 19
contact@bcb-tradical.com
www.bcb-tradical.com

Tradical® Finilys

Super-thin aerial lime render for interior finishes
80 colours

Application (continued)

REINFORCED RENDER FINISH

2 coats.

- Apply the first coat of Tradical® Finilys to achieve a **consistent thickness**. Leave to dry and then gently tighten using the finishing trowel.
- Apply the second coat of Tradical® Finilys immediately after the previous coat has hardened. GENTLY **REINFORCE** after leaving to dry. Repeat procedure two or three more times until a satiny shine has been achieved.

Usage

Mix proportion	Yield per m ²	Yield per 10 kg bucket	Average thickness
RENDER FINISH	0.4 to 0.6 kg	16 to 24 m ²	0.5 mm
REINFORCED RENDER FINISH	0.9 to 1.2 kg	8 to 12 m ²	1 mm

Colouring

Add the Tradical® Premium Classique or Intense measures as per the Tradical® Premium brochure – 80 colours available.

Sampling

Mix proportion	Tradical® Finilys	Tradical® Premium	Water	
			Add	Top-up
Work site	1 bucket of 10 kg	1 to 4 cans	6 l	+ 300 to 650 ml
Equivalent sample	500 g or 750 ml	1 to 4 x 25 ml	300 ml	+ 15 to 30 ml

IMPORTANT

- Mix the amount of product required for each coating surface in one go
- Observe the specified thicknesses
- Once completed, maintain substrate at room temperature for 3 to 4 days

Atmospheric conditions

Apply at a temperature of between +8 °C and +30 °C.

→ GENERAL INFORMATION

Professional qualifications

Only qualified persons with sound knowledge of interior renders or persons who have passed the CHAUX INTÉRIEUR module in the BCB training programme may use Tradical® Finilys.

See also

- Tradical® brochures and technical data sheets
- Relevant parts of the French Building Code

Packaging and storage

Tradical® Finilys comes in a 10 kg bag and can be stored for 1 year away from moisture.

Testing

Under the conditions of standard NF EN 459.

Guarantee

- Manufacturer's civil liability, SMABTP contract: ALPHA-BAT Fabricants no. 512806 E.
- Two and ten-year guarantees within the scope of the company's civil liability insurance

Tradical® Finilys includes:

Tradical® Interior Lime Render:

- Tradical® Décor
- Tradical® Finilys
- Tradical® Lait de Chaux
- Tradical® Premium
- Tradical® Pont d'Adhérence
- Tradical® Régulateur de Porosité



Lhoist Southern Europe
BCB

Adresse: ZAC de Valentin
rue du Choumois - BP 3011
25045 BESANÇON cedex
Tel. + 33 (0)3 81 47 40 10
Fax + 33 (0)3 81 47 40 19
contact@bcb-tradical.com
www.bcb-tradical.com